

ZAŁĄCZNIK NR 1 DO SIWZ
SZCZEGÓŁOWY OPIS TECHNICZNY



Part Number	LSUM 129R6C 0062F EA
Document Number	V06_160111

Product specification

LSUM 129R6C 0062F EA



Product specification

■ Specification

1. Primary specification

Part number	Capacitance (F)	Resistance DC (mΩ)	Max. Current (A, 1s) ¹⁾	Leakage Current (mA)
LSUM 129R6C 0062F EA	62	13.2	2,200	< 27

2. Power & Energy

Part number	Usable Specific Power, P_d (W/kg)	Impedance Match Specific Power, P_{max} (W/kg)	Energy Density (Wh/kg)	Stored Energy (Wh)
LSUM 129R6C 0062F EA	2,700	5,700	2.6	144.6

3. Standard & Reliability

Rated Voltage	129.6V				
Max. Voltage ²⁾	136.8V				
Maximum Series Voltage	1500V				
Capacitance Tolerance	-0% / +20%				
Resistance Tolerance	< Spec. Value				
Operating temperature range	-40 ~ 65 °C				
Storage temperature range	-40 ~ 70 °C				
Thermal Resistance	0.035°C/W				
Max. continuous current	$\Delta T = 15^{\circ}\text{C}$	190A			
	$\Delta T = 40^{\circ}\text{C}$	260A			
Endurance	After 1500 hours application of Rated voltage DC at 65°C, the capacitor shall meet the following limits.				
	Capacitance change	Within 20% of initially specified value			
	Internal resistance change	Within 100% of initially specified value			
Shelf life	4 Years stored uncharged state at +25°C				
Life Time (25°C)	After 10 years at rated voltage and +25 °C				
	Capacitance change	Within 20% of initially specified value			
	Internal resistance change	Within 100% of initially specified value			
Cycle Life (25°C)	After 1,000,000 cycles between rated voltage to half rated voltage at +25 °C				
	Capacitance change	Within 20% of initially specified value			
	Internal resistance change	Within 100% of initially specified value			

4. Monitoring

Part number	Temperature sensor	Temperature & Voltage interface	Connector	Cell voltage monitoring	Balancing
LSUM 129R6C 0062F EA	NTC Thermistor	CAN 2.0B	KD3102A 16S-8P (5-pin)	Group voltage monitoring	Passive or Active

^{1) Remarks}

- 1) Current for 1sec discharge from the rated voltage to the half of it in constant current discharge, do not use as an operating current.
- 2) Non repeated, not to exceed 1sec.



Product specification




■ Safety & Physical Protection

Isolation voltage (DC)	Short circuit current(A)	Power Terminals	Recommended Torque - Terminal	Environmental Protection	Shock & vibration Protection
4kV	9,800	M8 / M10	20 / 30 Nm	IP 67	IEC-61373

Dimension in mm (not to scale)

■ Geometric properties

Part number	Dimension (mm)			Weight (kg)
	Length	Width	Height	
L5UM 129R6C 0062F EA	720±2	405±2	226±2	Max. 55

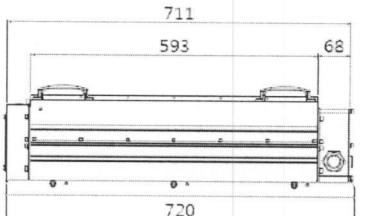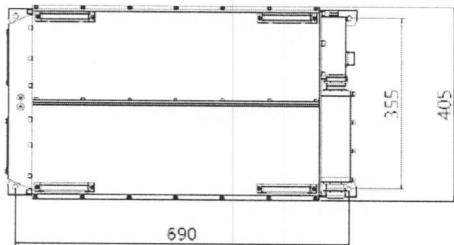

Technical Information (1)

■ How to calculate specification value

1. The Measurement Methods


1-1 Capacitance

Apply rated voltage and charge for 5min after the constant current / constant voltage power supply has achieved the rated voltage. After a charge for 5min has finished, discharge with 10mA/F.

Measure the time t_1 to t_2 where the voltage between capacitor terminals at the time of discharge reduces from V_1 to V_2 as shown figure and calculate the capacitance value by the following formula:

- 1) Constant current charge with 10mA/F to V_R
- 2) Constant voltage charge at V_R for 5min
- 3) Constant current discharge with 10mA/F

$$C = \frac{I \times (t_2 - t_1)}{V_2 - V_1}$$

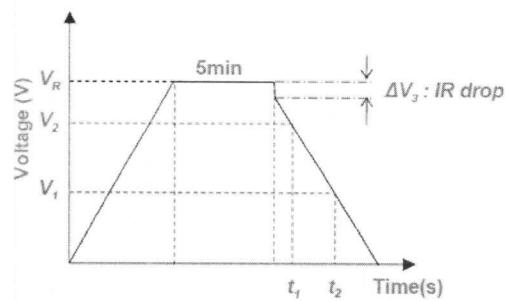


1-2 Resistance

The DC resistance of a capacitor shall be calculated by the following formula;

$$R_{DC} = \frac{\Delta V}{I_{DC}}$$

Where R_{DC} is the DC internal resistance (Ω);
 ΔV is the drop voltage for 10ms (V);
 I_{DC} is the discharge current (A).

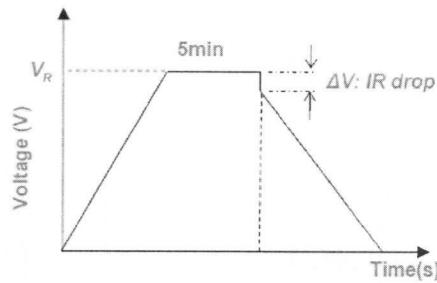

Technical Information (2)

1-3 Leakage current

The leakage current shall be measured using the direct voltage appropriate to the test temperature(25°C) for 72hrs.

1-4 Maximum current

Current for 1sec discharge from the rated voltage to the half of it in constant current discharge,

$$I_{Max} = \frac{V_R - 0.5^*V_R}{\Delta t / C + R_{DC}}$$

Where I_{Max} is the Maximum current (A);

Δt is the discharge time (sec), 1 sec in this case ;

C is the capacitance (F);

R_{DC} is the DC resistance (Ω);

V_R is the rated voltage (V).

1-5 Maximum stored energy (E_{MAX})

$$E_{MAX} (Wh) = \frac{\frac{1}{2} CV_R^2}{3600}$$

2. The Standard Atmospheric Condition for Measurement

All test and measurements shall be made under standard atmospheric conditions for testing. Before the measurements are made, the capacitor shall be stored at the measuring temperature for a time sufficient to allow the entire capacitor to reach this temperature. The period as prescribed for recovery at the end of a test is a normally sufficient for this purpose.

Temperature : 15~35 °C

Relative humidity : 25~75%

Air Pressure : 86~106 kPa



LS Mtron Ltd.
tel. 82-31-428-4545 | Email: ultracapacitor@mtron.com
885 Hopye-dong, Dongan-gu, Anyang-si, Gyeonggi-do, Korea



ZAŁĄCZNIK NR 2 DO SIWZ